


E-M7N type, replacement product of Eagle Burgmann M7N type

Temperature: -50~220°C

Speed: 20 m/s

Pressure: 2.5Mpa

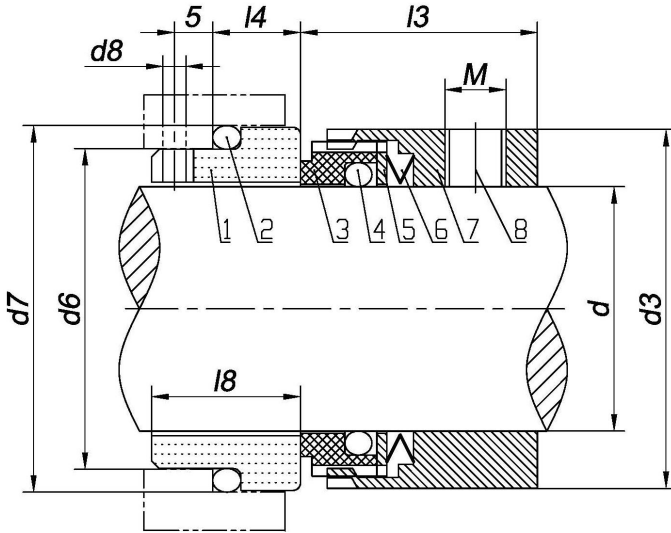

- 1 Stationary ring
- 2 O-ring
- 3 Rotary ring
- 4 O-ring
- 5 Washer
- 6 Wave spring
- 7 Drive collar
- 8 Set screw

<i>d</i>	<i>d3</i>	<i>d6</i>	<i>d7</i>	<i>d8</i>	<i>l3</i>	<i>l4</i>	<i>l8</i>	<i>l5</i>	<i>M</i>
14	25	21	25	3	25	10	17.5	6	M5
16	27	23	27	3	25	10	17.5	6	M5
18	33	27	33	3	26	11.5	19.5	7	M5
20	35	29	35	3	26	11.5	19.5	7	M5
22	37	31	37	3	26	11.5	19.5	7	M5
24	39	33	39	3	28.5	11.5	19.5	8	M5
25	40	34	40	3	28.5	11.5	19.5	8	M5
28	43	37	43	3	31	11.5	19.5	8	M6
30	45	39	45	3	31	11.5	19.5	8	M6
32	47	42	48	3	31	11.5	19.5	8	M6
33	48	42	48	3	31	11.5	19.5	8	M6
35	50	44	50	3	31	11.5	19.5	8	M6
38	55	49	56	4	31	14	22	8	M6
40	57	51	58	4	31	14	22	8	M6
43	60	54	61	4	31	14	22	8	M6
45	62	56	63	4	31	14	22	8	M6
48	65	59	66	4	31	14	22	8	M6
50	67	62	70	4	32.5	15	23	8	M6
53	70	65	73	4	32.5	15	23	8	M6
55	72	67	75	4	32.5	15	23	8	M6
58	79	70	78	4	37.5	15	23	9	M8
60	81	72	80	4	37.5	15	23	9	M8
63	84	75	83	4	37.5	15	23	9	M8
65	86	77	85	4	37.5	15	23	9	M8
68	89	81	90	4	34.5	18	26	9	M8
70	91	83	92	4	42	18	26	9	M8
75	99	88	97	4	42	18	26	10	M8
80	104	95	105	4	41.8	18.2	26.2	10	M8
85	109	100	110	4	41.8	18.2	26.2	10	M8
90	114	105	115	4	46.8	18.2	26.2	10	M8
95	119	110	120	4	47.8	17.2	25.2	10	M8
100	124	115	125	4	47.8	17.2	25.2	10	M8