


E-M74-D type, replacement product of Eagle Burgmann M74-D type, dual seal mechanical seal

Temperature: -50~220℃

Speed: 20 m/s

Pressure: 1Mpa

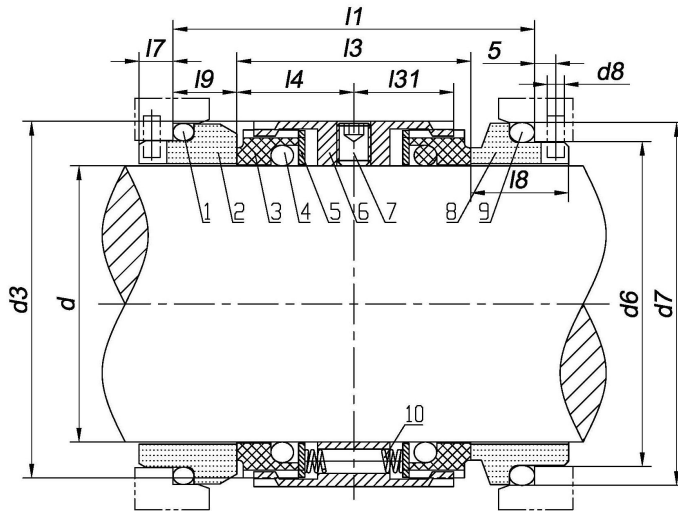

- 1 O-ring
- 2 Stationary ring
- 3 Rotary ring
- 4 O-ring
- 5 Washer
- 6 Drive collar
- 7 Set screw
- 8 Stationary ring
- 9 O-ring
- 10 Spring

d	d3	d6	d7	d8	l1	l3	l4	l7	l8	l9	l31
18	33	27	33	3	61	38	19	9	19.5	11.5	17
20	35	29	35	3	61	38	19	9	19.5	11.5	17
22	37	31	37	3	61	38	19	9	19.5	11.5	17
24	39	33	39	3	61	38	19	9	19.5	11.5	17
25	40	34	40	3	61	38	19	9	19.5	11.5	17
28	43	37	43	3	62	39	19.5	9	19.5	11.5	17.5
30	45	39	45	3	62	39	19.5	9	19.5	11.5	17.5
32	47	42	48	3	62	39	19.5	9	19.5	11.5	17.5
33	48	42	48	3	62	39	19.5	9	19.5	11.5	17.5
35	50	44	50	3	62	39	19.5	9	19.5	11.5	17.5
38	55	49	56	4	69	41	20.5	9	22	14	18.5
40	57	51	58	4	70	42	21	9	22	14	19
43	60	54	61	4	70	42	21	9	22	14	19
45	62	56	63	4	70	42	21	9	22	14	19
48	65	59	66	4	70	42	21	9	22	14	19
50	67	62	70	4	73	43	21.5	9	23	15	19.5
53	70	65	73	4	73	43	21.5	9	23	15	19.5
55	72	67	75	4	73	43	21.5	9	23	15	19.5
58	79	70	78	4	86	56	28	9	23	15	23.5
60	81	72	80	4	86	56	28	9	23	15	23.5
63	84	75	83	4	85	55	27.5	9	23	15	24.5
65	86	77	85	4	85	55	27.5	9	23	15	24.5
68	89	81	90	4	91	55	27.5	9	26	18	24.5
70	91	83	92	4	92	56	28	9	26	18	23.5
75	99	88	97	4	92	56	28	9	26	18	25.5
80	104	95	105	4	92.5	56	28	9	26.2	18.2	25.5
85	109	100	110	4	92.5	56	28	9	26.2	18.2	25
90	114	105	115	4	92.5	56	28	9	26.2	18.2	25.5
95	119	110	120	4	90.5	56	28	9	25.2	17.2	25
100	124	115	125	4	90.5	56	28	9	25.2	17.2	25