


# DEPESEAL MECHANICAL SEAL DEPESEAL mechanical sealing

E-ED560 type, replacement product of Eagle Burgmann ED560 type, Rubber bellows type mechanical seal, dual seal mechanical seal

Temperature: -20~+70°C

Speed: 5 m/s

Pressure: P1=0.2Mpa( $d \leq 19\text{mm}$ ), P1=0.3Mpa( $d \geq 20\text{mm}$ )

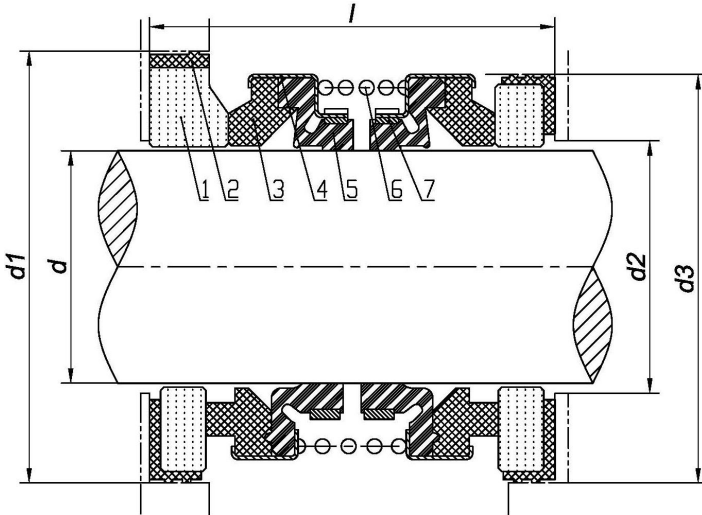

- 1 Stationary ring
- 2 Rubber cup
- 3 Rotary ring
- 4 Spring collar
- 5 Bellows
- 6 Spring
- 7 Drive collar

| <i>d</i> | <i>d1</i> | <i>d2</i> | <i>d3</i> | <i>l</i> |
|----------|-----------|-----------|-----------|----------|
| 13       | 25        | 17        | 25        | 36       |
| 14       | 30        | 20        | 30        | 36       |
| 15       | 30        | 20        | 30        | 36       |
| 16       | 30        | 20        | 30        | 36       |
| 20       | 44        | 23        | 38        | 49       |
| 25       | 50        | 28        | 44        | 51       |
| 30       | 57        | 33        | 50        | 59       |
| 35       | 65        | 38        | 58        | 61       |
| 40       | 70        | 43        | 64        | 64.5     |
| 45       | 70        | 48        | 66        | 65       |
| 50       | 80        | 53        | 72        | 69.5     |