


DEPESEAL MECHANICAL SEAL DEPESEAL mechanical sealing

E-2100 type, replacement product of John Crane 2100 type, Rubber bellows type mechanical seal

Temperature: -40~+150°C

Speed: 15m/s

Pressure: 2Mpa

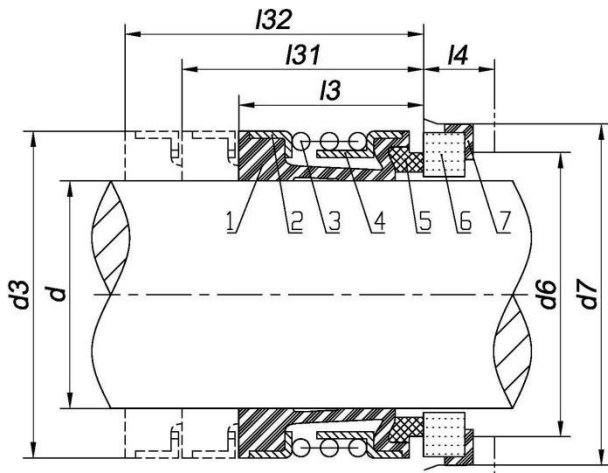

- 1 Bellows
- 2 Drive collar
- 3 Spring
- 4 Spring collar
- 5 Rotary ring
- 6 Stationary ring
- 7 Rubber cup

L3 = Standard seal working length

L31=Working length for seal to DIN L1K

L32=Working length for seal to DIN L1N

d	d3	d6	d7	l3	l31	l32	l4
10	20	15	21	15	27.5	35	5
12	22	17	23	15	26.5	34	6
14	24	19	25	15	29	34	6
15	25	20	26	15	29	34	6
16	26	23	27	15	29	34	6
18	32	25	33	20	31.5	39	6
20	34	27	35	20	31.5	39	6
22	36	29	37	20	31.5	39	6
24	38	31	39	20	34	44	6
25	39	32	40	20	34	44	6
28	42	35	43	26	36.5	44	6
30	44	37	45	26	35.5	43	7
32	46	40	48	26	35.5	48	7
33	47	40	48	26	35.5	48	7
35	49	42	50	26	34.5	47	8
38	54	47	56	30	37	47	8
40	56	49	58	30	37	47	8
43	59	52	61	30	37	52	8
45	61	54	63	30	37	52	8
48	64	57	66	30	35	50	10
50	66	60	70	30	37.5	50	10
53	69	63	73	30	37.5	60	10
55	71	65	75	30	37.5	60	10
58	78	68	78	33	42.5	60	10
60	80	70	80	33	40.5	58	12
63	83	73	83	33	40.5	58	12
65	85	75	85	33	40.5	68	12
68	88	79	90	33	40.5	68	12
70	90	81	92	33	48	68	12
75	99	86	97	40	48	68	12
80	104	92	105	40	47.5	77.5	12.5
85	109	97	110	40	47.5	77.5	12.5
90	114	102	115	40	52.5	77.5	12.5
95	119	117	120	40	52.5	77.5	12.5
100	124	122	125	40	52.5	77.5	12.5