


E-RO type, replacement product of Flowserve RO type

Temperature: -20~180℃

Speed: 15 m/s

Pressure: 1Mpa

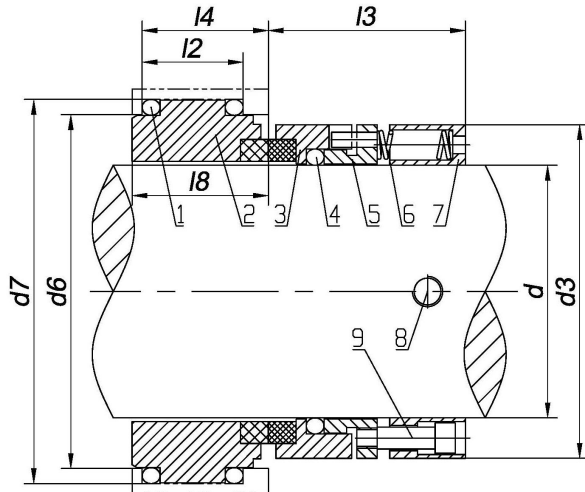

- 1 O-ring
- 2 Stationary ring
- 3 Rotary ring
- 4 O-ring
- 5 Push ring
- 6 Spring
- 7 Spring seat
- 8 Set screw
- 9 Screw

d	d3	d6	d7	l2	l3	l4	l8
20	34	36	42	18	35	23	25
22	36	38	44	18	35	23	25
24	38	40	46	18	35	23	25
25	39	41	47	18	35	23	25
28	42	44	50	18	35	23	25
30	44	46	52	18	35	23	25
32	46	48	54	18	35	23	25
33	47	49	55	18	35	23	25
35	49	51	57	18	35	23	25
38	54	58	64	20	38	25	27
40	56	60	66	20	38	25	27
42	58	62	68	20	38	25	27
43	59	63	69	20	38	25	27
45	61	65	71	20	38	25	27
48	64	68	74	20	38	25	27
50	66	70	76	20	39	25	27
52	68	72	78	20	40	25	27
53	69	73	79	20	40	25	27
55	71	75	81	20	40	25	27
58	76	83	89	22	41	28	30
60	78	85	91	22	41	28	30
62	80	87	93	22	41	28	30
63	81	88	94	22	41	28	30
65	83	90	96	22	41	28	30
68	86	93	99	24	41	30	32
70	90	95	101	24	42	30	32
75	95	104	110	24	42	30	32
80	100	109	115	25	42	31	33
85	105	114	120	25	43	31	33
90	110	119	125	25	45	31	33
95	115	124	130	25	45	31	33
100	120	129	135	25	45	31	33